
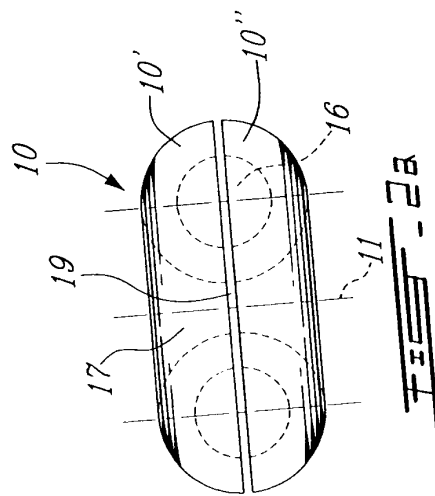
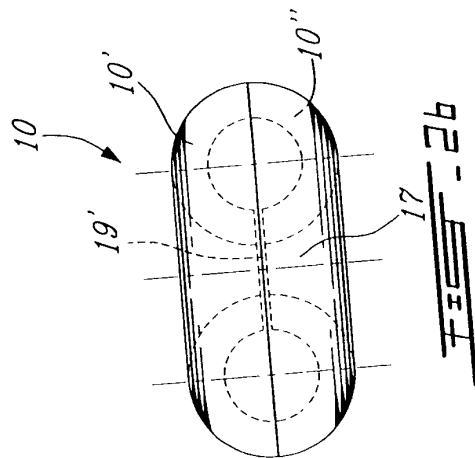
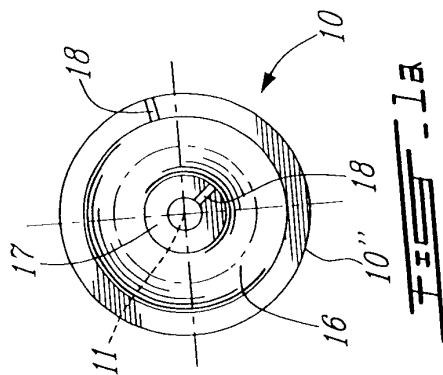

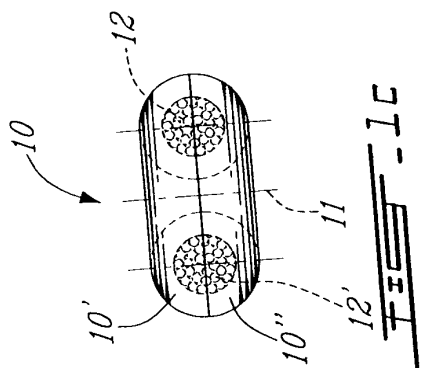
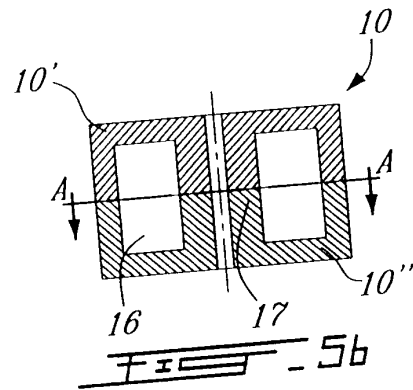
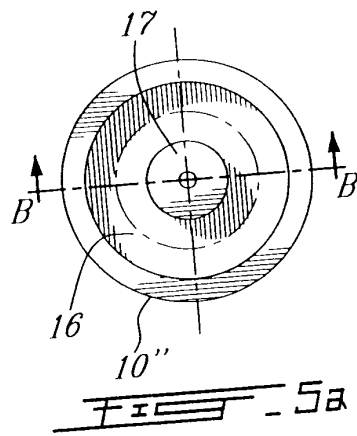
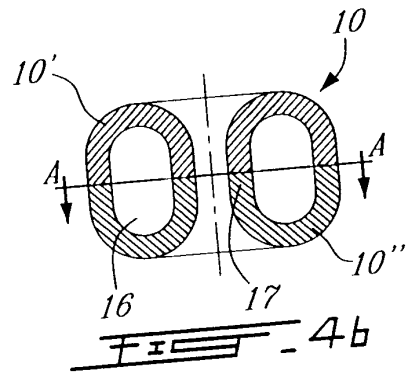
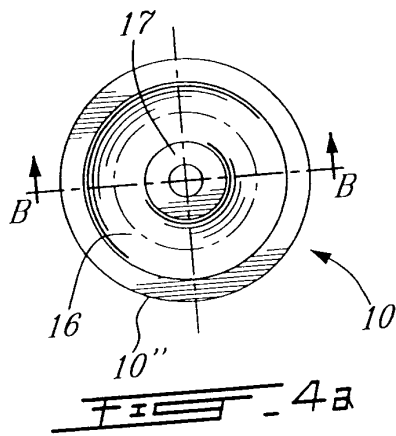
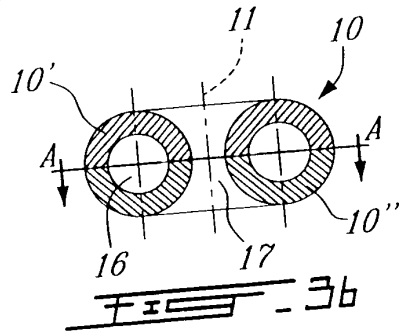






1/6






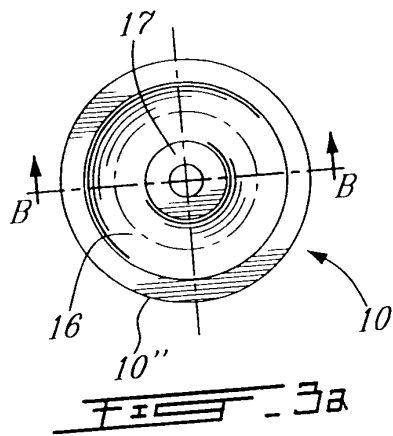


11-11

2/6



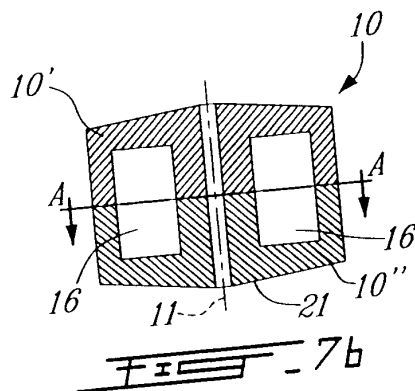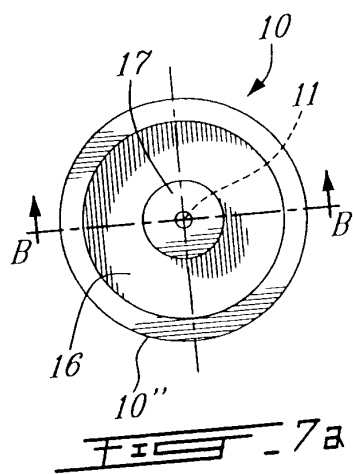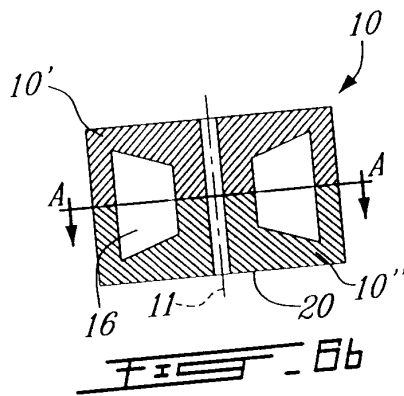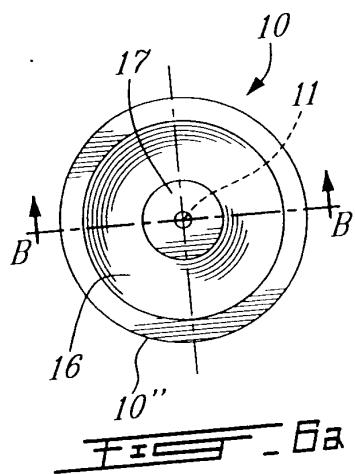

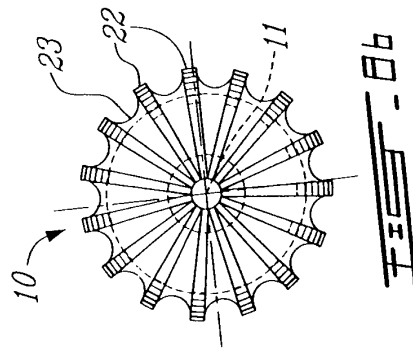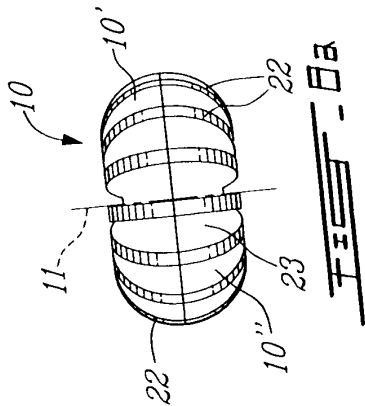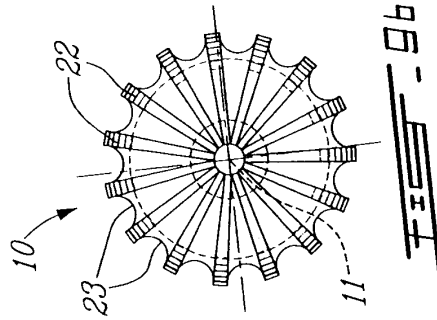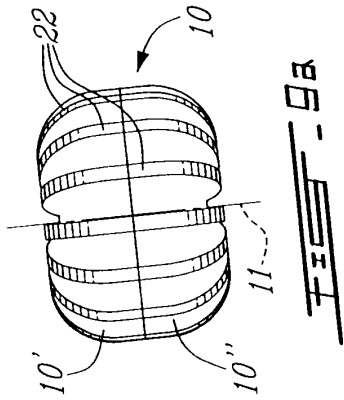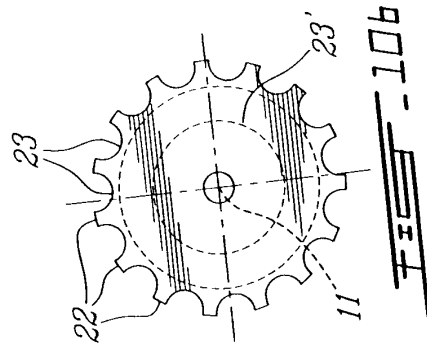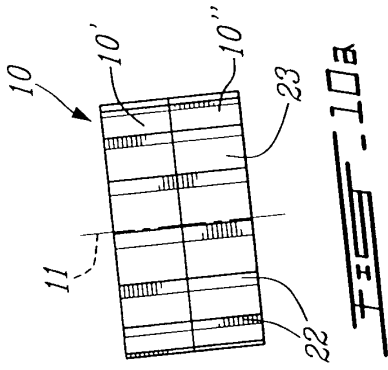

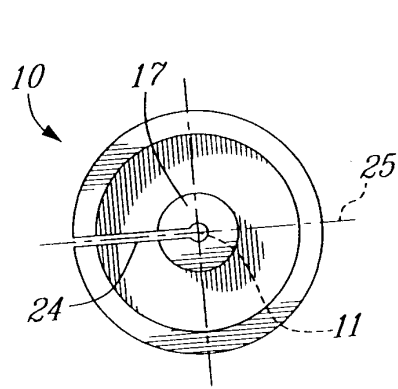


FIG. 11a

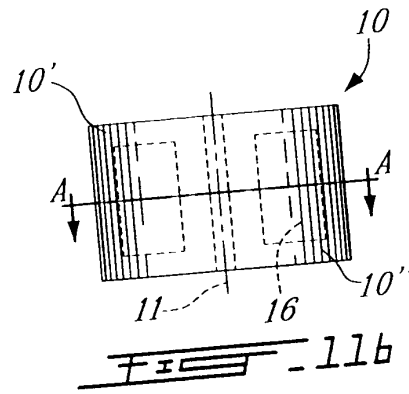


FIG. 11b

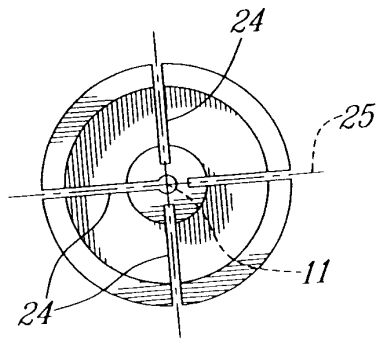


FIG. 11c

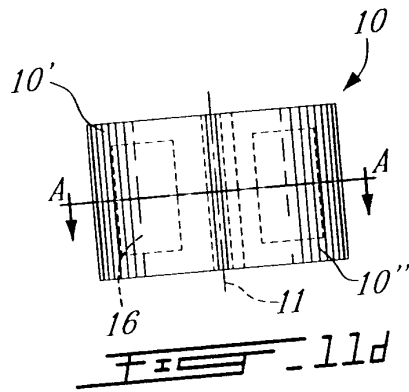


FIG. 11d

13


Low frequency AC
supply system
(50 hz to 1000 hz)

Cylindrical transformer
with composite magnetic
material with one or
several secondary windings
(each connected or not
connected to a rectifier)

15

14

14'



Electronic rectifier
(diode and/or thyristor
and/or transistor)

Filter

6/6

FIG. 12